



Certificate of Compliance

Certificate No. : BSTXD210821267904EC
Applicant : DONGGUAN BAIER APPLIANCE CO . ; LTD .
NO5, LONGHUA BRANCH ROAD, DONGCHENG
STREET, DONGGUAN CITY, GUANGDONG PROVINCE,
CHINA
Manufacturer : DONGGUAN BAIER APPLIANCE CO . ; LTD .
NO5, LONGHUA BRANCH ROAD, DONGCHENG
STREET, DONGGUAN CITY, GUANGDONG PROVINCE,
CHINA
Product Name : Sonic Electric Toothbrush
Trade Name : 朗恺
Main Test Model : BE-5618
Additional Model : BE-5118; BE-5538; BE-5718; BE-6116; BE-6116B; BE-6118;
BE-6119; BE-7116
Test Standard : EN55014-1:2017/A11:2020
EN IEC61000-3-2:2019
EN61000-3-3:2013/A1:2019
EN55014-2:2015
**As shown in the
Test Report No.** : BSTXD210821267904ER

The EUT described above has been tested by us with the listed standards and found in compliance with the council EMC directive 2014/30/EU. It is possible to use CE marking to demonstrate the compliance with this EMC Directive.
The certificate applies to the tested sample above mentioned only and shall not imply an assessment of the whole production.



CE



Christina Deng
Manager
Aug.11, 2021

BST Testing (Shenzhen) Co.,Ltd.

Add: No.7, New Era Industrial Zone, Guantian, Bao'an District, Shenzhen, Guangdong, China

Certificate Search: <http://www.bst-lab.com>, Tel:4009626168, 8009990305, E-mail:christina@bst-lab.com



DONGGUAN BAIER APPLIANCE CO . ; LTD .

CE EMC REPORT

Prepared For :	DONGGUAN BAIER APPLIANCE CO . ; LTD . NO5, LONGHUABRANCHROAD, DONGCHENG STREET, DONGGUAN CITY, GUANGDONG PROVINCE, CHINA
Product Name:	Sonic Electric Toothbrush
Trade Name:	朗恺
Model :	BE-5618; BE-5118; BE-5538; BE-5718; BE-6116; BE-6116B; BE-6118; BE-6119; BE-7116
Prepared By :	BST Testing (Shenzhen) Co.,Ltd. No.7, New Era Industrial Zone, Guantian, Bao'an District, Shenzhen, Guangdong, China
Test Date:	Aug.05-11, 2021
Date of Report :	Aug.11, 2021
Report No.:	BSTXD210821267904ER



TABLE OF CONTENTS

TEST REPORT DECLARATION.....	5
1. TEST RESULTS SUMMARY.....	6
2. GENERAL INFORMATION.....	7
2.1. Report information.....	7
2.2. Measurement Uncertainty.....	7
3. PRODUCT DESCRIPTION.....	8
3.1. EUT Description.....	8
3.2. Block Diagram of EUT Configuration.....	8
3.3. Operating Condition of EUT.....	8
3.4. Test Conditions.....	8
3.5. Modifications.....	8
3.6. Abbreviations.....	9
3.7. Performance Criterion.....	9
4. TEST EQUIPMENT USED.....	10
4.1. For Conducted Emission Test.....	10
4.2. For Radiated Emission Measurement.....	10
4.3. For Harmonic / Flicker Test.....	10
4.4. For Electrostatic Discharge Immunity Test.....	10
4.5. For RF Strength Susceptibility Test.....	10
4.6. For Electrical Fast Transient/Burst Immunity Test.....	11
4.7. For Surge Test.....	11
4.8. For Injected Currents Susceptibility Test.....	11
4.9. For Magnetic Field Immunity Test.....	11
4.10. For Voltage Dips and Interruptions Test.....	11
5. POWER LINE CONDUCTED EMISSION TEST.....	12
5.1. Block Diagram of Test Setup.....	12
5.2. Test Standard.....	12
5.3. Power Line Conducted Emission Limit.....	12
5.4. EUT Configuration on Test.....	12
5.5. Operating Condition of EUT.....	13
5.6. Test Procedure.....	13
5.7. Test Result.....	13
6. RADIATED EMISSION TEST.....	14
6.1. Semi-Anechoic Chamber Setup Diagram.....	14
6.2. Test Standard.....	14
6.3. Radiated Emission Limit.....	14
6.4. EUT Configuration on Test.....	14
6.5. Operating Condition of EUT.....	15
6.6. Test Procedure.....	15
6.7. Test Results.....	15
7. DISTURBANCE POWER TEST.....	16
7.1. Block Diagram of Test Setup.....	16



7.2. Disturbance Power Limit.....	16
7.3. EUT Configuration on Test.....	16
7.4. Operating Condition of EUT.....	16
7.5. Test Procedure.....	17
7.6. Disturbance Power Test Result.....	17
8. HARMONIC CURRENT EMISSION TEST.....	18
8.1. Block Diagram of Test Setup.....	18
8.2. Test Standard and Limit.....	18
8.3. Test Procedure.....	19
8.4. Test Results.....	19
9. VOLTAGE FLUCTUATIONS & FLICKER TEST.....	20
9.1. Block Diagram of Test Setup.....	20
9.2. Test Standard.....	20
9.3. Operating Condition of EUT.....	20
9.4. Test Results.....	20
10. ELECTROSTATIC DISCHARGE TEST.....	21
10.1. Block Diagram of ESD Test Setup.....	21
10.2. Test Standard.....	21
10.3. Severity Levels and Performance Criterion.....	21
10.4. EUT Configuration on Test.....	21
10.5. Operating Condition of EUT.....	21
10.6. Test Procedure.....	22
10.7. Test Results.....	22
11. RF FIELD STRENGTH SUSCEPTIBILITY TEST.....	24
11.1. R/S Test Setup.....	24
11.2. Test Standard.....	24
11.3. Severity Levels and Performance Criterion.....	24
11.4. EUT Configuration on Test.....	25
11.5. Operating Condition of EUT.....	25
11.6. Test Procedure.....	25
11.7. Test Results.....	25
12. ELECTRICAL FAST TRANSIENT/BURST TEST.....	27
12.1. EFT Test Setup.....	27
12.2. Test Standard.....	27
12.3. Severity Levels and Performance Criterion.....	27
12.4. EUT Configuration on Test.....	27
12.5. Operating Condition of EUT.....	27
12.6. Test Procedure.....	28
12.7. Test Results.....	28
13. SURGE TEST.....	30
13.1. Surge Test Setup.....	30
13.2. Test Standard.....	30
13.3. Severity Levels and Performance Criterion.....	30
13.4. EUT Configuration on Test.....	30
13.5. Operating Condition of EUT.....	30
13.6. Test Procedure.....	31
13.7. Test Results.....	31
14. INJECTED CURRENTS SUSCEPTIBILITY TEST.....	33



14.1. Block Diagram of Test AC Mains Setup.....	33
14.2. Test Standard.....	33
14.3. Severity Levels and Performance Criterion.....	33
14.4. EUT Configuration on Test.....	33
14.5. Operating Condition of EUT.....	33
14.6. Test Procedure.....	34
14.7. Test Results.....	34
15. MAGNETIC FIELD IMMUNITY TEST.....	36
15.1. Block Diagram of Test Setup.....	36
15.2. Test Standard.....	36
15.3. Severity Levels and Performance Criterion.....	36
15.4. EUT Configuration on Test.....	36
15.5. Operating Condition of EUT.....	37
15.6. Test Procedure.....	37
15.7. Test Results.....	37
16. VOLTAGE DIPS AND INTERRUPTIONS TEST.....	39
16.1. Voltage Dips and Interruptions Test Setup.....	39
16.2. Test Standard.....	39
16.3. Severity Levels and Performance Criterion.....	39
16.4. EUT Configuration on Test.....	39
16.5. Operating Condition of EUT.....	39
16.6. Test Procedure.....	40
16.7. Test Result.....	40
APPENDIX I.....	42
APPENDIX II.....	45
APPENDIX III.....	47



TEST REPORT DECLARATION

Applicant	:	DONGGUAN BAIER APPLIANCE CO . ; LTD .
Address	:	NO5, LONGHUA BRANCH ROAD, DONGCHENG STREET, DONGGUAN CITY, GUANGDONG PROVINCE, CHINA
EUT Description	:	Sonic Electric Toothbrush
Model Number	:	BE-5618; BE-5118; BE-5538; BE-5718; BE-6116; BE-6116B; BE-6118; BE-6119; BE-7116 (Note: The series products have the same circuit diagram, PCB layout and functionality. The differences are the model name and appearance, so, we select BE-5618 to test.)
Test Standards: EN55014-1:2017/A11:2020 EN IEC61000-3-2:2019 EN61000-3-3:2013/A1:2019 EN55014-2:2015		

The EUT described above is tested by BST Testing (Shenzhen) Co.,Ltd. EMC Laboratory to determine the maximum emissions from the EUT and ensure the EUT to be compliance with the immunity requirements of the EUT. BST Testing (Shenzhen) Co.,Ltd. EMC Laboratory is assumed full responsibility for the accuracy of the test results. Also, this report shows that the EUT technically complies with the 2014/30/EU directive and its amendment requirements.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

Prepared by :

Assistant

Tested by :

Reviewer :



Approved & Authorized Signer :

Salon/Manager



1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	Test Results
Radiated Emission	PASS
Conducted Disturbance	N/A
Harmonic Current	N/A
Voltage Fluctuation and Flicker	N/A
Electrostatic Discharge Immunity	PASS
Radiated Electromagnetic Fields Immunity	PASS
Electric Fast Transient Burst Immunity	N/A
Surge Immunity	N/A
Injected currents susceptibility test	N/A
Magnetic Field Immunity Test	PASS
Voltage dips and interruptions Immunity	N/A



2. GENERAL INFORMATION

2.1. Report information

- 2.1.1. This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that BST approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that BST in any way guarantees the later performance of the product/equipment.
- 2.1.2. The sample/s mentioned in this report is/are supplied by Applicant, BST therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.
- 2.1.3. Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through BST, unless the applicant has authorized BST in writing to do so.

2.2. Measurement Uncertainty

(95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Radiation emission test (30MHz to 1GHz)	4.0dB




3. PRODUCT DESCRIPTION

3.1.EUT Description

Description	:	Sonic Electric Toothbrush
Applicant	:	DONGGUAN BAIER APPLIANCE CO .; LTD . NO5, LONGHUA BRANCH ROAD, DONGCHENG STREET, DONGGUAN CITY, GUANGDONG PROVINCE, CHINA
Manufacturer	:	DONGGUAN BAIER APPLIANCE CO .; LTD . NO5, LONGHUA BRANCH ROAD, DONGCHENG STREET, DONGGUAN CITY, GUANGDONG PROVINCE, CHINA
Model Number	:	BE-5618; BE-5118; BE-5538; BE-5718; BE-6116; BE-6116B; BE-6118; BE-6119; BE-7116

3.2.Block Diagram of EUT Configuration



3.3.Operating Condition of EUT

Test mode 1: ON

3.4. Test Conditions

Temperature: 23-26°C

Relative Humidity: 55-68 %

3.5.Modifications

No modification was made.



3.6 Abbreviations

AC	Alternating Current
AMN	Artificial Mains Network
DC	Direct Current
EM	ElectroMagnetic
EMC	ElectroMagnetic Compatibility
EUT	Equipment Under Test
IF	Intermediate Frequency
RF	Radio Frequency
rms	root mean square
EMI	Electromagnetic Interference
EMS	Electromagnetic Susceptibility

3.7 Performance Criterion

Criterion A: The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended.

Criterion B: After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended.

Criterion C: Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions.



4. TEST EQUIPMENT USED

4.1. For Conducted Emission Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS30	828985/018	Oct. 08, 21	1 Year
2.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	Oct. 08, 21	1 Year
3.	L.I.S.N.	Rohde & Schwarz	ESH2-Z5	834549/005	Oct. 08, 21	1 Year
4.	Conical	Emtek	N/A	N/A	N/A	N/A
5.	Voltage Probe	Schwarzbeck	TK9416	N/A	Oct. 08, 21	1 Year
6.	Coaxial Switch	Anritsu	MP59B	6100214550	Oct. 08, 21	1 Year

4.2. For Radiated Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	ANRITSU	MS2661C	6200140915	Oct. 08, 21	1 Year
2.	Test Receiver	Rohde&Schwarz	ESC830	828982/018	Oct. 08, 21	1 Year
3.	Bilog Antenna	Schwarzbeck	VULB9163	142	Oct. 08, 21	1 Year
4.	50 Coaxial Switch	Anritsu Corp	MP59B	6100237248	Oct. 08, 21	1 Year
5.	Cable	Schwarzbeck	AK9513	ACRX1	Oct. 08, 21	1 Year
6.	Cable	Rosenberger	N/A	FR2RX2	Oct. 08, 21	1 Year
7.	Cable	Schwarzbeck	AK9513	CRRX2	Oct. 08, 21	1 Year
8.	Cable	Schwarzbeck	AK9513	CRRX2	Oct. 08, 21	1 Year
9.	Signal Generator	HP	864A	3625U00573	Oct. 08, 21	1 Year

4.3. For Harmonic / Flicker Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Harmonic and Flicker analyzer	Laplace	AC2000A	309709	Oct. 08, 21	1 Year

4.4. For Electrostatic Discharge Immunity Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	ESD Tester	HAEFELY	PSD 1600	H911'292	Oct. 08, 21	1 Year

4.5. For RF Strength Susceptibility Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Signal Generator	HP	8648A	3633A02081	Oct. 08, 21	1 Year
2.	Amplifier	A&R	500A100	17034	NCR	NCR
3.	Amplifier	A&R	100W/1000M1	17028	NCR	NCR
4.	Isotropic Field Monitor	A&R	FM2000	16829	NCR	NCR
5.	Isotropic Field Probe	A&R	FLW220100	16755	Oct. 08, 21	1 Year
6.	Biconic Antenna	EMCO	3108	9507-2534	NCR	NCR
7.	Log-periodic Antenna	A&R	AT1080	16812	NCR	NCR
8.	PC	N/A	486DX2	N/A	N/A	N/A



4.6. For Electrical Fast Transient/Burst Immunity Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Burst Tester	HAEFELY	PEFT 4010	080981-16	Oct. 08, 21	1 Year

4.7. For Surge Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Surge Tester	HAEFELY	PSURGE4.1	080107-04	Oct. 08, 21	1 Year

4.8. For Injected Currents Susceptibility Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Simulator	EMTEST	CWS 500C	0900-12	Oct. 08, 21	1 Year
2.	CDN	EMTEST	CDN-M2	510010010010	Oct. 08, 21	1 Year
3.	VDN	EMTEST	CDN-M3	0900-11	Oct. 08, 21	1 Year
4.	Injection Clamp	EMTEST	F-2031-23MM	368	Oct. 08, 21	1 Year
5.	Attenuator	EMTEST	ATBE-5618	0010222a	Oct. 08, 21	1 Year

4.9. For Magnetic Field Immunity Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Magnetic Field Tester	HEAFELY	MAG100.1	083858-10	Oct. 08, 21	1 Year


4.10. For Voltage Dips and Interruptions Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Dips Tester	HEAFELY	PLINE 1610	083732-18	Oct. 08, 21	1 Year



5. POWER LINE CONDUCTED EMISSION TEST

5.1. Block Diagram of Test Setup

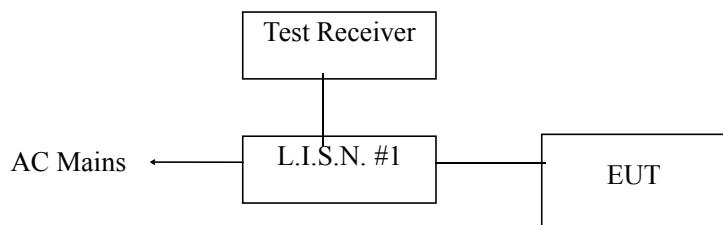

5.2. Test Standard

EN55014-1:2017/ A11:2020

5.3. Power Line Conducted Emission Limit

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	59 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

5.4. EUT Configuration on Test

The following equipments are installed on conducted emission test to meet EN55014 requirement and operating in a manner, which tends to maximize its emission characteristics in a normal application.

5.4.1. EUT Information

Model Number : BE-5618
Serial Number : BE-5118; BE-5538; BE-5718; BE-6116; BE-6116B; BE-6118;
BE-6119; BE-7116
Manufacturer : DONGGUAN BAIER APPLIANCE CO . ; LTD .



5.5.Operating Condition of EUT

- 5.5.1.Setup the EUT and simulators as shown in Section 5.1.
- 5.5.2.Turn on the power of all equipments.
- 5.5.3.Let the EUT work in test modes (ON) and test it.

5.6.Test Procedure

The EUT is put on the ground and connected to the AC mains through a Artificial Mains Network (AMN). This provided 50ohm-coupling impedance for the tested equipments. Both sides of AC line are checked to find out the maximum conducted emission levels according to the EN55014 regulations during conducted emission test.

The bandwidth of the test receiver is set at 9kHz.

The frequency range from 150 KHz to 30 MHz is investigated.


5.7.Test Result

N/A



6. RADIATED EMISSION TEST

6.1.Semi-Anechoic Chamber Setup Diagram

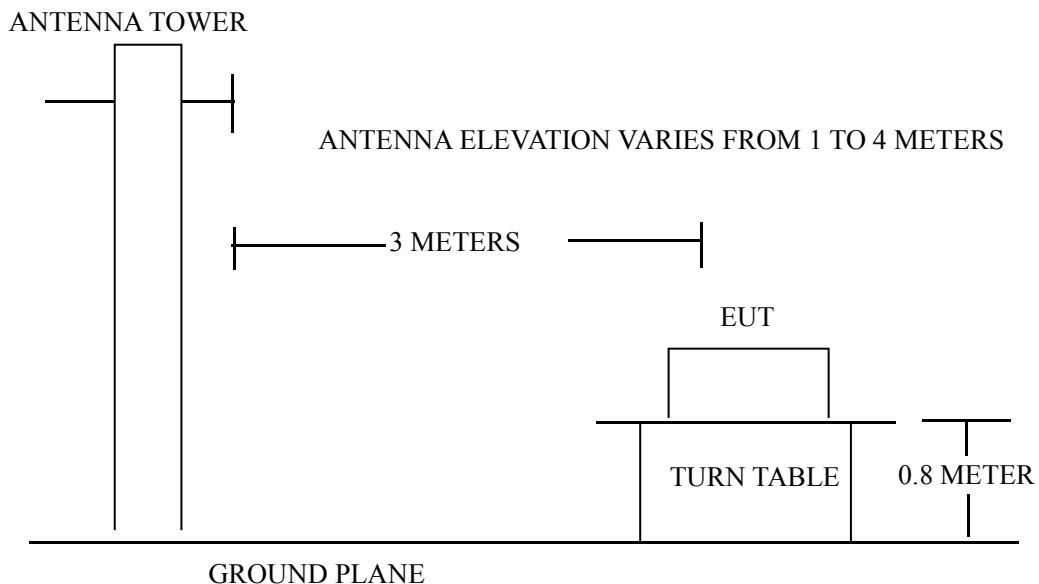

6.2.Test Standard

EN55014-1:2017/ A11:2020

6.3.Radiated Emission Limit

All emanations from a computing devices or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

FREQUENCY (MHz)	DISTANCE (Meters)	FIELD STRENGTHS LIMITS (dB μ V/m)
30 ~ 230	3	40
230 ~ 1000	3	47

Note:(1) The tighter limit shall apply at the edge between two frequency bands.
(2) Distance refers to the distance in meters between the measuring instruments antenna and the closed point of any part of the EUT.

6.4.EUT Configuration on Test

The EN55014 regulations test method must be used to find the maximum emission during radiated emission test.



6.5.Operating Condition of EUT

- 6.5.1.Setup the EUT as shown on Section 6.1.
- 6.5.2.Turn on the power of all equipments.
- 6.5.3.Let the EUT work in test mode(On) and measure it.

6.6.Test Procedure

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna (calibrated by dipole antenna) are used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth setting on the test receiver is 120 KHz.

The EUT is tested in Semi-Anechoic Chamber. and all the scanning waveform is put in **Appendix I.**


6.7.Test Results

PASS.



7. DISTURBANCE POWER TEST

7.1. Block Diagram of Test Setup

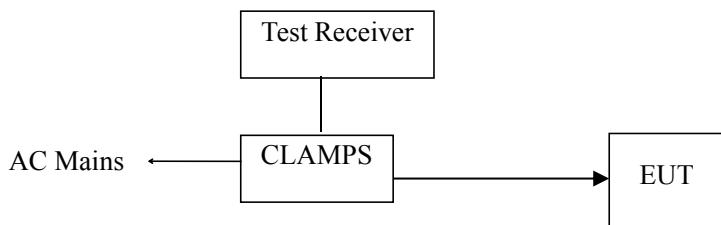

(EUT: SONIC ELECTRIC TOOTHBRUSH)

7.2. Disturbance Power Limit

All emanations from devices or system including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

Frequency MHz	Interference Power Limits dB(pW)	
	Quasi-peak Value	Average Value
30 ~ 300	45 Increasing Linearly with Frequency to 55 (Q.P.)	35 Increasing Linearly with Frequency to 45 (A.V.)

7.3. EUT Configuration on Test

The EN55014 regulations test method must be used to find the maximum emission during radiated emission test.

The configuration of EUT is the same as used in conducted emission test. Please refer to Section 3.2

7.4. Operating Condition of EUT

Same as conducted emission test, which is listed in Section 5.1., except the test set up replaced as Section 7.1.



7.5. Test Procedure

The EUT is placed on the ground and away from other metallic surface at least 0.4m. It is connected to the power mains through an extension cord of 6m min. The absorber clamp clamps the cord and moves from the far end to the EUT to measure the disturbing energy emitted from the cord.

The bandwidth of the test receiver is set at 120kHz.

All the test results are listed in Section 7.6.

The frequency spectrum from 30 MHz to 300 MHz is investigated.

As the peak value is too low against the limit, so the quasi-peak value and average value have omitted. All the scanning waveforms are attached in **Appendix II**.

7.6. Disturbance Power Test Result


PASS.



8. HARMONIC CURRENT EMISSION TEST

8.1. Block Diagram of Test Setup

AC Mains



8.2. Test Standard and Limit

8.2.1. Test Standard

EN61000-3-2:2019

8.2.2. Limits

Table 12 Harmonic Current Test Limit (Class A)

Harmonic order (n)	Maximum permissible harmonic current (A)
Odd harmonics	
3	2.30
5	1.14
7	0.77
9	0.40
11	0.33
13	0.21
15≤n≤39	0.15×15/n
Even harmonics	
2	1.08
4	0.43
6	0.30
8≤n≤40	0.23×8/n



8.3. Test Procedure

The power cord of the EUT is connected to the output of the test system. Turn on the Power of the EUT and use the test system to test the harmonic current level.

8.4. Test Results

N/A



9. VOLTAGE FLUCTUATIONS & FLICKER TEST

9.1. Block Diagram of Test Setup

Same as Section 8.1..

9.2. Test Standard

EN61000-3-3:2013/A: 2019

9.3. Operating Condition of EUT

Same as Section 8.3.. The power cord of the EUT is connected to the output of the test system.
Turn on the power of the EUT and use the test system to test.

Flicker Test Limit

Test items	Limits
Pst	1.0
dc	3.3%
dmax	4.0%
dt	Not exceed 3.3% for 500ms


9.4. Test Results

N/A



10.ELECTROSTATIC DISCHARGE TEST

10.1.Block Diagram of ESD Test Setup

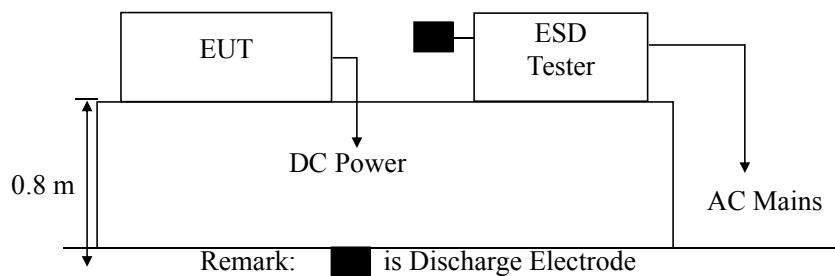

10.2.Test Standard

EN55014-2:2015 (EN61000-4-2:2009)
Severity Level 3 for Air Discharge at 8KV
Severity Level 2 for Contact Discharge at 4KV

10.3.Severity Levels and Performance Criterion

10.3.1.Severity level

Level	Test Voltage Contact Discharge (KV)	Test Voltage Air Discharge (KV)
1.	2	2
2.	4	4
3.	6	8
4.	8	15
X.	Special	Special

10.3.2.Performance criterion: B

10.4.EUT Configuration on Test

The configuration of EUT are listed in Section 3.2.

10.5.Operating Condition of EUT

10.5.1.Setup the EUT as shown in Section 10.1.

10.5.2.Turn on the power of all equipments.

10.5.3.Let the EUT work in test mode (on) and test it.



10.6. Test Procedure

10.6.1. Air Discharge:

This test is done on a non-conductive surfaces. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT.

After each discharge, the discharge electrode shall be removed from the EUT.

The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

10.6.2. Contact Discharge:

All the procedure shall be same as Section 10.6.1. except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

10.6.3. Indirect discharge for horizontal coupling plane

At least 20 single discharges shall be applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane.

10.6.4. Indirect discharge for vertical coupling plane

At least 20 single discharge shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

10.7. Test Results

PASS.

Please refer to the following page.



Electrostatic Discharge Test Results

BST Testing (Shenzhen) Co.,Ltd.

Applicant	:	DONGGUAN BAIER APPLIANCE CO . ; LTD .	Test Date	:	Aug.11, 2021
EUT	:	Sonic Electric Toothbrush	Temperature	:	22 °C
M/N	:	BE-5618	Humidity	:	50 %
Power Supply	:	-	Test Mode	:	ON

Air Discharge: $\pm 8KV$

For each point positive 10 times and negative 10 times discharge.

Contact Discharge: $\pm 4KV$


Location	Kind A-Air Discharge C-Contact Discharge	Result
Slots	A	PASS
Metal Part	C	PASS
HCP	C	PASS
VCP	C	PASS

Discharge should be considered on Contact and Air and Horizontal Coupling Plane (HCP) and Vertical Coupling Plane (VCP).



11.RF FIELD STRENGTH SUSCEPTIBILITY TEST

11.1.R/S Test Setup

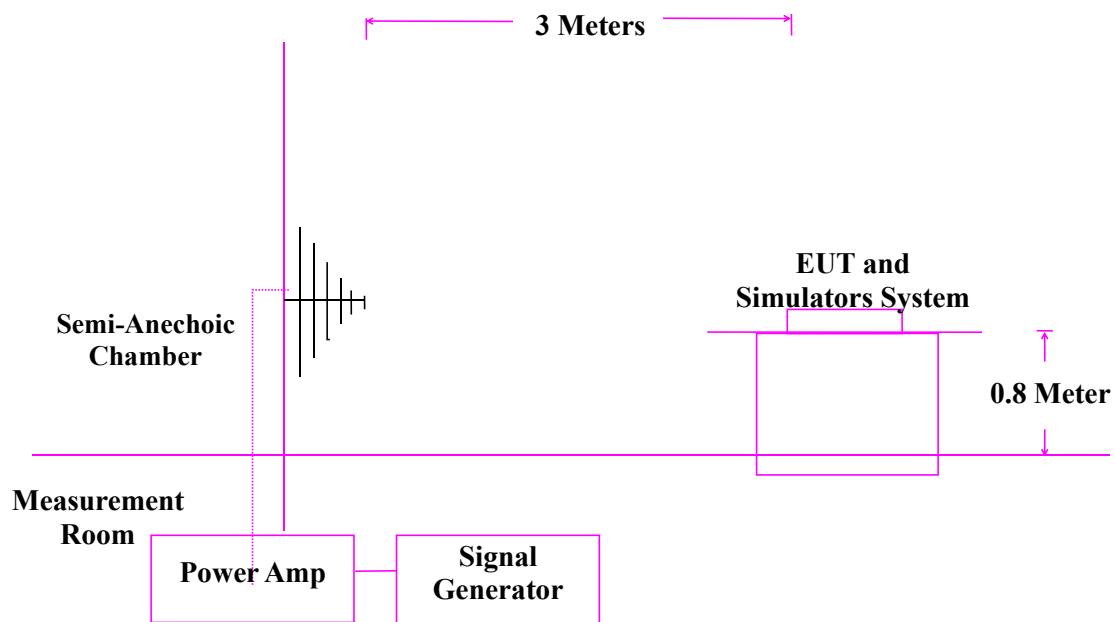

11.2.Test Standard

EN55014-2:2015 (EN 61000-4-3:2006 + A1:2008 + A2:2010)
Severity Level 2 at 3V / m

11.3.Severity Levels and Performance Criterion

11.3.1.Severity level

Level	Field Strength V/m
1.	1
2.	3
3.	10
X.	Special

11.3.2.Performance criterion : A



11.4.EUT Configuration on Test

The configuration of EUT are listed in Section 3.2

11.5.Operating Condition of EUT

Setup the EUT as shown in Section 11.1.. The operating condition of EUT are listed in section 3.3.

11.6.Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above the ground. The EUT is set 3 meters away from the transmitting antenna which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna are set on test. Each of the four sides of EUT must be faced this transmitting antenna and measured individually.

In order to judge the EUT performance, a CCD camera is used to monitor the EUT.
All the scanning conditions are as follows :

Condition of Test	Remarks
1. Fielded Strength	3 V/m (Severity Level 2)
2. Radiated Signal	Modulated
3. Scanning Frequency	80 - 1000 MHz, 1.4GHz-2.7GHz
4. Sweeping time of radiated	0.0015 decade/s
5. Dwell Time	1 Sec.

11.7.Test Results

PASS.

Please refer to the following page.



RF Field Strength Susceptibility Test Results


BST Testing (Shenzhen) Co.,Ltd.

Applicant	: DONGGUAN BAIER APPLIANCE CO . ; LTD .	Test Date	: Aug.11, 2021
EUT	: Sonic Electric Toothbrush	Temperature	: 22 °C
M/N	: BE-5618	Humidity	: 50 %
Power Supply	: -	Test Mode	: ON
Frequency Range :	80 MHz to 1000 MHz, 1.4GHz-2.7GHz		
Modulation:	<input checked="" type="checkbox"/> AM <input type="checkbox"/> Pulse <input type="checkbox"/> none	1 KHz	80%
Criterion :	A		
	Frequency Rang :	80-1000MHZ, 1.4GHz-2.7GHz	
Steps	1%	1%	
	Horizontal	Vertical	
Front	Pass	Pass	
Right	Pass	Pass	
Rear	Pass	Pass	
Left	Pass	Pass	



12.ELECTRICAL FAST TRANSIENT/BURST TEST

12.1.EFT Test Setup

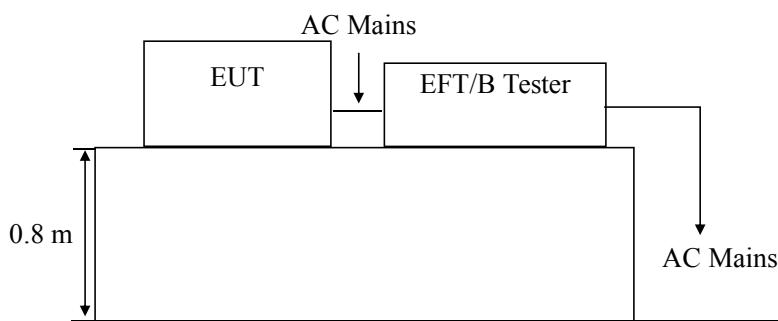

12.2.Test Standard

EN55014-2:2015 (EN61000-4-4:2012)
Severity Level 2 at 1KV

12.3.Severity Levels and Performance Criterion

12.3.1.Severity level

Open Circuit Output Test Voltage ±10%		
Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1.	0.5 KV	0.25 KV
2.	1 KV	0.5 KV
3.	2 KV	1 KV
4.	4 KV	2 KV
X	Special	Special

12.3.2.Performance criterion : B

12.4.EUT Configuration on Test

The configuration of EUT are listed in Section 3.2..

12.5.Operating Condition of EUT

Setup the EUT as shown in Section 12.1.. The operating condition of EUT are listed in section 3.3.



12.6. Test Procedure

The EUT is put on the table which is 0.8 meter high above the ground. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between the EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.

12.6.1. For input and output AC power ports:

The EUT is connected to the power mains by using a coupling device which couples the EFT interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 2 mins.

12.6.2. For signal lines and control lines ports:

It's unnecessary to test.

12.6.3. For DC output line ports:

It's unnecessary to test.

12.7. Test Results

N/A



Electrical Fast Transient/Burst Test Results


BST Testing (Shenzhen) Co.,Ltd.

Applicant	DONGGUAN BAIER APPLIANCE CO . ; LTD .			Test Date	Aug.11, 2021				
EUT	Sonic Electric Toothbrush			Temperature	22 °C				
M/N	BE-5618			Humidity	50 %				
Power Supply	-			Test Mode	-				
Inject Place : AC Mains									
Inject Line	Voltage KV	Inject Time(s)	Inject Method	Results	Inject Line	Voltage KV	Inject Time(s)	Inject Method	Results
L	±1	120	Direct	--					
N	±1	120	Direct	--					
L N	±1	120	Direct	--					



13.SURGE TEST

13.1.Surge Test Setup

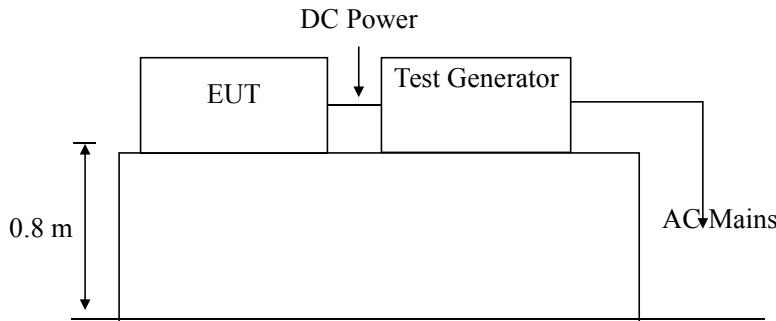

13.2.Test Standard

EN55014-2:2015 (EN61000-4-5:2014)
Severity Level 2 for Line to Neutral at 1.0KV

13.3.Severity Levels and Performance Criterion

13.3.1.Severity level

Severity Level	Open-Circuit Test Voltage KV
1	0.5
2	1.0
3	2.0
4	4.0
*	Special

Performance criterion : **B**

13.4.EUT Configuration on Test

The configuration of EUT are listed in Section 3.2.

13.5.Operating Condition of EUT

13.5.1.Setup the EUT as shown in Section 13.1..

13.5.2.Turn on the power of all equipments.

13.5.3.Let the EUT work in test mode (on) and test it.



13.6. Test Procedure

- 1) Setup the EUT and test generator as shown on Section 13.1.
- 2) For line to line coupling mode, provide a 0.5KV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points.
- 3) At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.
- 4) Different phase angles are done individually.
- 5) Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

13.7. Test Results

N/A



Surge Immunity Test Results


BST Testing (Shenzhen) Co.,Ltd.

Applicant	: DONGGUAN BAIER APPLIANCE CO . ; LTD .			Test Date	: Aug.11, 2021	
EUT	: SONIC ELECTRIC TOOTHBRUSH			Temperature	: 22 °C	
M/N	: BE-5618			Humidity	: 50%	
Power Supply	: -			Test Mode	: -	
Location	Polarity	Phase Angle	No of Pulse	Pulse Voltage (KV)	Result	
L-N	+	0	5	1.0	--	
	+	90	5	1.0	--	
	+	180	5	1.0	--	
	+	270	5	1.0	--	
	-	0	5	1.0	--	
	-	90	5	1.0	--	
	-	180	5	1.0	--	
	-	270	5	1.0	--	



14. INJECTED CURRENTS SUSCEPTIBILITY TEST

14.1. Block Diagram of Test AC Mains Setup

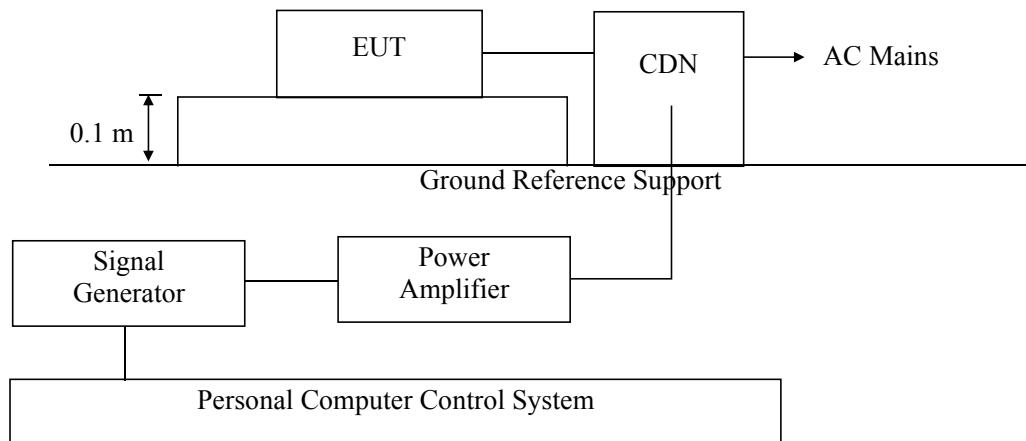

14.2. Test Standard

EN55014-2:2015 (EN61000-4-6:2014)
Severity Level 2 at 3 V (rms), 0.15MHz ~ 80MHz

14.3. Severity Levels and Performance Criterion

14.3.1. Severity level

Level	Field Strength V/m
1.	1
2.	3
3.	10
X	Special

14.3.2. Performance criterion: A

14.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.2

14.5. Operating Condition of EUT

Setup the EUT as shown in Section 14.1.. The operating condition of EUT are listed in section 3.3



14.6. Test Procedure

- 1) Set up the EUT, CDN and test generators as shown on Section 14.1.
- 2) Let the EUT work in test mode and test it.
- 3) The EUT are placed on an insulating support 0.8m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).
- 4) The disturbance signal described below is injected to EUT through CDN.
- 5) The EUT operates within its operational mode(s) under intended climatic conditions after power on.
- 6) The frequency range is swept from 150KHz to 80MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1KHz sine wave.
- 7) The rate of sweep shall not exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.
- 8) Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

14.7. Test Results

N/A



Injected Currents Susceptibility Test Results

BST Testing (Shenzhen) Co.,Ltd.


Applicant	: DONGGUAN BAIER APPLIANCE CO . ; LTD .		Test Date	Aug.11, 2021
EUT	: SONIC ELECTRIC TOOTHBRUSH		Temperature	22 °C
M/N	: BE-5618		Humidity	50 %
Power Supply	: -		Test Mode	-
Frequency Range (MHz)	Injected Position	Strength	Criterion	Result
0.15 ~ 20	AC Line	3V(rms), Unmodulated	A	--
20 ~ 80	AC Line	3V(rms), Unmodulated	A	--



15. MAGNETIC FIELD IMMUNITY TEST


15.1. Block Diagram of Test Setup

15.1.1. Block Diagram of the EUT



(EUT: Sonic Electric Toothbrush)

15.1.2. Block Diagram of Test Setup

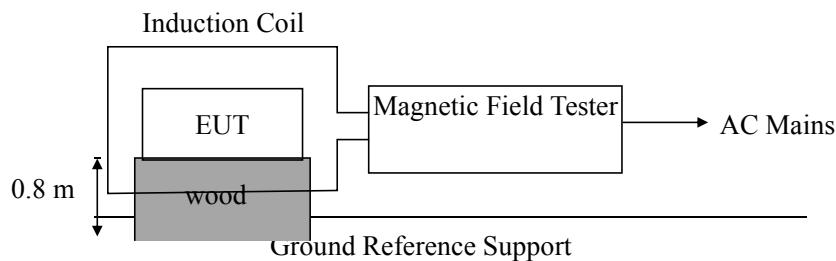

15.2. Test Standard

EN55014-2:2015 (EN61000-4-11: 2020)
Severity Level 1 at 1A/m

15.3. Severity Levels and Performance Criterion

15.3.1. Severity level

Level	Magnetic Field Strength A/m
1.	1
2.	3
3.	10
4.	30
5.	100
X.	Special

15.3.2. Performance criterion : A

15.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.2.



15.5.Operating Condition of EUT

- 15.5.1.Setup the EUT as shown in Section 15.1
- 15.5.2.Turn on the power of all equipments.
- 15.5.3.Let the EUT work in test mode (ON) and test it.

15.6.Test Procedure

The EUT shall be subjected to the test magnetic field by using the induction coil of standard dimensions (1m*1m) and shown in Section 14.1. The induction coil shall then be rotated by 90°in order to expose the EUT to the test field with different orientations.

15.7.Test Results

PASS.

Please refer to the following page.



Magnetic Field Immunity Test Results


BST Testing (Shenzhen) Co.,Ltd.

<p>Applicant : DONGGUAN BAIER APPLIANCE CO . ; LTD .</p> <p>EUT : Sonic Electric Toothbrush</p> <p>M/N : <u>BE-5618</u></p> <p>Power Supply : -</p>	<p>Test Date : Aug.11, 2021</p> <p>Temperature : 22 °C</p> <p>Humidity : 60 %</p>			
<p>Test Model: ON</p>				
Test Level	Testing Duration	Coil Orientation	Criterion	Result
IA/M	5 mins	Horizontal	A	PASS
IA/M	5 mins	Vertical	A	PASS
Remark:	Test Equipment : Magnetic Field Tester MAG100.1			



16.VOLTAGE DIPS AND INTERRUPTIONS TEST

16.1.Voltage Dips and Interruptions Test Setup

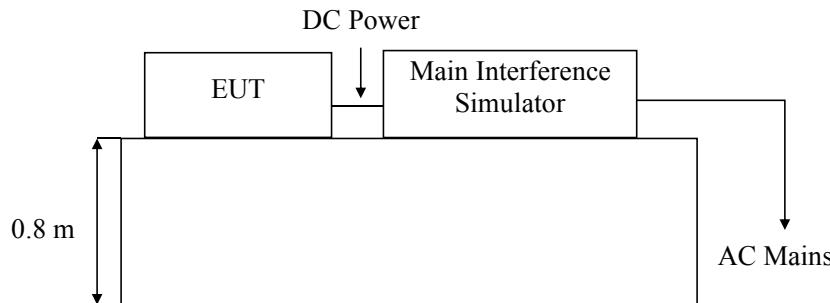

Remark: Combination wave generator and decoupling network are included in test generator.

16.2.Test Standard

EN55014-2:2015 (EN61000-4-11:2004)

16.3.Severity Levels and Performance Criterion

16.3.1.Severity level

Test Level %UT	Voltage dip and short interruptions %UT	Duration (in period)
0	100	0.5p
40	60	10p
70	30	25p

16.3.2.Performance criterion : C

16.4.EUT Configuration on Test

The configuration of EUT are listed in Section 3.2.

16.5.Operating Condition of EUT

16.5.1.Setup the EUT as shown in Section 16.1.

16.5.2.Turn on the power of all equipments.

16.5.3.Let the EUT work in test mode (On) and test it.



16.6. Test Procedure

- 1) Set up the EUT and test generator as shown on Section 16.1.
- 2) The interruptions is introduced at selected phase angles with specified duration.
- 3) Record any degradation of performance.

16.7. Test Result

N/A



Voltage Dips And Interruptions Test Results

BST Testing (Shenzhen) Co.,Ltd.

<i>Applicant</i>	<i>DONGGUAN BAIER APPLIANCE CO . ; LTD .</i>		<i>Test Date</i>	<i>Aug.11, 2021</i>	
<i>EUT</i>	<i>Sonic Electric Toothbrush</i>		<i>Temperature</i>	<i>22 °C</i>	
<i>M/N</i>	<i>BE-5618</i>		<i>Humidity</i>	<i>50 %</i>	
<i>Power Supply</i>	<i>-</i>		<i>Test Mode</i>	<i>-</i>	
<i>Test Level % U_T</i>	<i>Voltage Dips & Short Interruptions % U_T</i>	<i>Duration (in period)</i>	<i>Phase Angle</i>	<i>Criterion</i>	<i>Result</i>
0	100	0.5p	0° ~360°	C	--
40	60	10p	0° ~360°	C	--
70	30	25p	0° ~360°	C	--



BST Testing (Shenzhen) Co.,Ltd.

Report No.: BSTXD210821267904ER

APPENDIX I




Shenzhen BST Technology Co., Ltd.

Address: 3F, Weames technology Building, No.10 Kefa Road, Science Park,
Nanshan District, Shenzhen, Guangdong, China 518057

www.bst-lab.com

CNAS L3574

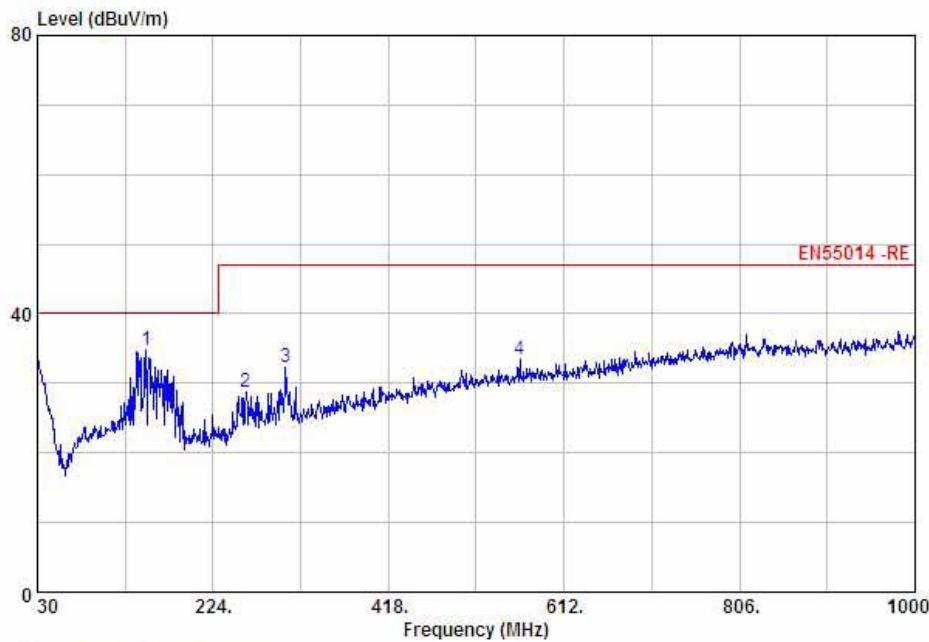

Site : Shenzhen BST Technology Co.,Ltd.
Condition

: EN55014 -RE 3m HORIZONTAL
: RBW:120.000KHz VBW:300.000KHz SWT:Auto

Freq	Level	Line	Limit	Over	Remark	Pol/Phase
MHz	dBuV/m	dBuV/m	dB			

1 max	150.28	34.84	40.00	-5.16	Peak	HORIZONTAL
2	260.86	28.75	47.00	-18.25	Peak	HORIZONTAL
3	304.51	32.22	47.00	-14.78	Peak	HORIZONTAL
4	563.50	33.39	47.00	-13.61	Peak	HORIZONTAL




Shenzhen BST Technology Co., Ltd.

Address: 3F, Weames technology Building, No.10 Kefa Road, Science Park,
Nanshan District, Shenzhen, Guangdong, China 518057

www.bst-lab.com

CNAS L3574

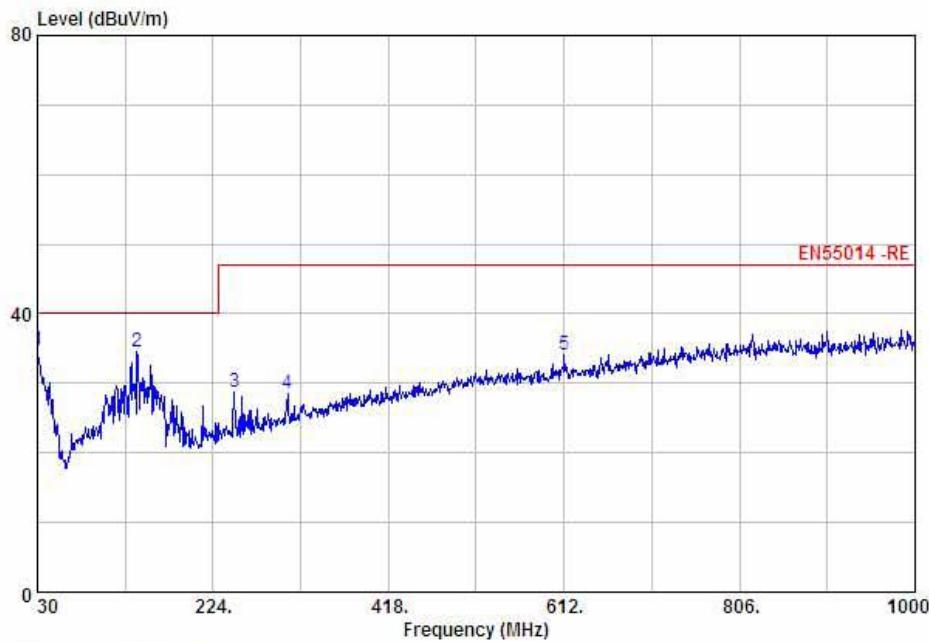

Site : Shenzhen BST Technology Co.,Ltd.
Condition :

: EN55014 -RE 3m VERTICAL
: RBW:120.000KHz VBW:300.000KHz SWT:Auto

Freq	Level	Line	Limit	Over	Remark	Pol/Phase
MHz	dBuV/m	dBuV/m	dB			

1 max	30.00	34.68	40.00	-5.32	Peak	VERTICAL
2	139.61	34.52	40.00	-5.48	Peak	VERTICAL
3	247.28	28.66	47.00	-18.34	Peak	VERTICAL
4	306.45	28.59	47.00	-18.41	Peak	VERTICAL
5	612.00	34.06	47.00	-12.94	Peak	VERTICAL



APPENDIX II




Shenzhen BST Technology Co., Ltd.

Address: 3F, Weames technology Building, No. 10 Kefa Road, Science Park,
Nanshan District, Shenzhen, Guangdong, China 518057

www.bst-lab.com

CNAS L3574

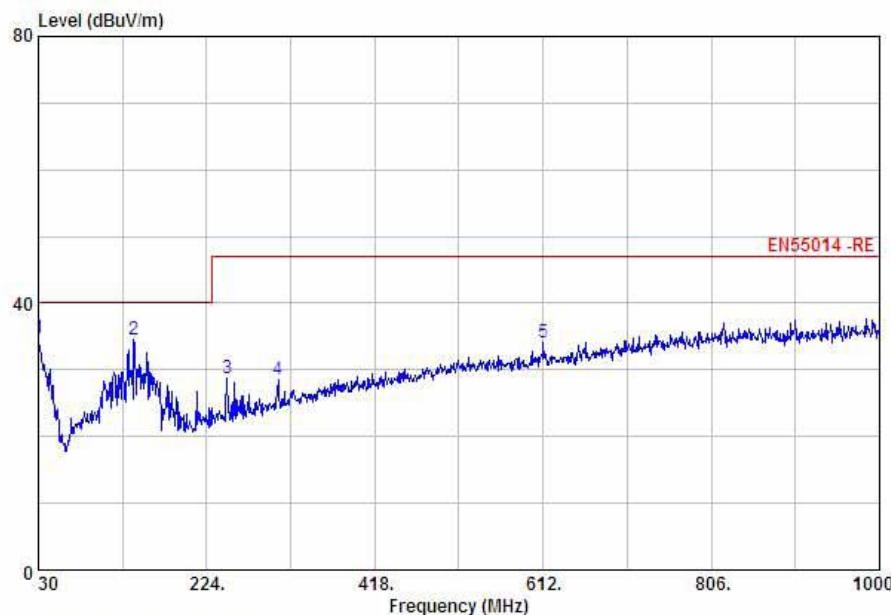

Site : Shenzhen BST Technology Co.,Ltd.
Condition

: EN55014 -RE 3m VERTICAL
: RBW:120.000KHz VBW:300.000KHz SWT:Auto

Freq	Level	Line	Over	Remark	Pol/Phase
MHz	dBuV/m	dBuV/m	dB		
1 max	30.00	34.68	40.00	-5.32 Peak	VERTICAL
2	139.61	34.52	40.00	-5.48 Peak	VERTICAL
3	247.28	28.68	47.00	-18.34 Peak	VERTICAL
4	306.45	28.59	47.00	-18.41 Peak	VERTICAL
5	612.00	34.06	47.00	-12.94 Peak	VERTICAL



BST Testing (Shenzhen) Co.,Ltd.

Report No.: BSTXD210821267904ER

APPENDIX III



Photo 1 General Appearance of the EUT



Photo 2 General Appearance of the EUT



Photo 3 Test scene

